



Benchmark Example No. 23

Undamped Free Vibration of a SDOF System

SOFiSTiK | 2018

VERiFiCATION MANUAL
BE23: Undamped Free Vibration of a SDOF System

VERiFiCATION MANUAL, Version 2018-7
Software Version: SOFiSTiK 2018

Copyright © 2018 by SOFiSTiK AG, Oberschleissheim, Germany.

SOFISTIK AG

HQ Oberschleissheim
Bruckmannring 38
85764 Oberschleissheim
Germany

T +49 (0)89 315878-0
F +49 (0)89 315878-23

info@sofistik.com
www.sofistik.com

Office Nuremberg
Burgschmietstr. 40
90419 Nuremberg
Germany

T +49 (0)911 39901-0
F +49(0)911 397904

This manual is protected by copyright laws. No part of it may be translated, copied or reproduced, in any form or by any means, without written permission from SOFiSTiK AG. SOFiSTiK reserves the right to modify or to release new editions of this manual.

The manual and the program have been thoroughly checked for errors. However, SOFiSTiK does not claim that either one is completely error free. Errors and omissions are corrected as soon as they are detected.

The user of the program is solely responsible for the applications. We strongly encourage the user to test the correctness of all calculations at least by random sampling.

Front Cover

Project: New SOFiSTiK Office, Nuremberg | Contractor: WOLFF & MLLER, Stuttgart | Architecture: WABE-PLAN ARCHITEKTUR, Stuttgart |
Structural Engineer: Boll und Partner. Beratende Ingenieure VBI, Stuttgart | MEP: GM Planen + Beraten, Griesheim | Lead Architect: Gerhard P.
Wirth gpwirtharchitekten, Nuremberg | Visualisation: Armin Dariz, BiMOTiON GmbH

Overview

Element Type(s):	SPRI
Analysis Type(s):	DYN
Procedure(s):	TSTP
Topic(s):	
Module(s):	DYNA
Input file(s):	undamped_s dof.dat

1 Problem Description

This problem consists of an undamped linearly elastic SDOF system undergoing free vibrations, as shown in Fig. 1. The response of the system is determined and compared to the exact reference solution.

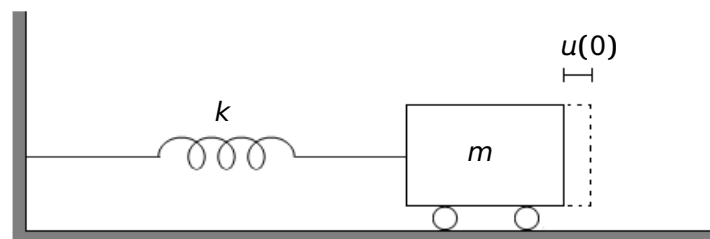


Figure 1: Problem Description

2 Reference Solution

The essential physical properties of a linearly elastic structural system subjected to an external excitation or dynamic loading are its mass, stiffness and damping. In the simplest model of a SDOF system, as shown in Fig. 2 in its idealized form, these properties are concentrated in a single physical element. For this system the elastic resistance to displacement is provided by the spring of stiffness k , while the energy-loss mechanism by the damper c . The mass m is included in the rigid body, which is able to move only in simple translation, and thus the single displacement coordinate $u(t)$ completely describes its position [1].

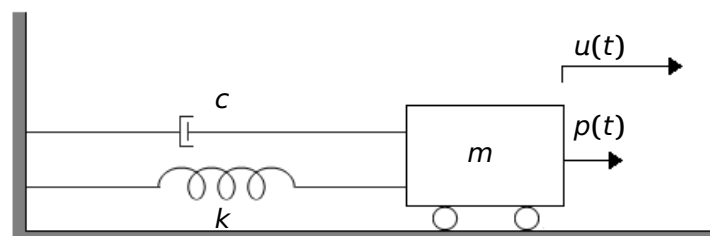


Figure 2: Problem Description

The motion of a linear SDOF system, subjected to an external force $p(t)$ is governed by [1] [2]:

$$m\ddot{u} + c\dot{u} + ku = p(t) \quad (1)$$

Setting $p(t) = 0$, gives the differential equation governing the free vibration of the system

$$m\ddot{u} + c\dot{u} + ku = 0 \quad (2)$$

For a system without damping ($c = 0$), Eq. 2 specialises to

$$m\ddot{u} + ku = 0 \quad (3)$$

Free vibration is initiated by disturbing the system from its static equilibrium position by imparting the mass some displacement $u(0)$ and/or velocity $\dot{u}(0)$ at time zero. Subjected to these initial conditions, the solution to the homogeneous differential equation of motion is:

$$u(t) = u(0)\cos(\omega_n t) + \frac{\dot{u}(0)}{\omega_n}\sin(\omega_n t) \quad (4)$$

where

$$\omega_n = \sqrt{\frac{k}{m}} \quad (5)$$

represents the natural circular frequency of vibration and f the natural cyclic frequency of vibration

$$f_n = \frac{\omega_n}{2\pi} \quad (6)$$

The period T represents the time required for the undamped system to complete one cycle of free vibration and is given by

$$T_n = \frac{2\pi}{\omega_n} = \frac{1}{f_n} \quad (7)$$

3 Model and Results

The properties of the model are defined in Table 1. The system is initially disturbed from its static equilibrium position by a displacement of 20 mm and is then let to vibrate freely. Eq. 4 is plotted in Fig.

4, presenting that the system undergoes vibration motion about its undeformed ($u = 0$) position, and that this motion repeats itself every $2\pi/\omega_n$ seconds. The exact solution is compared to the calculated time history of the displacement of the SDOF system for different time integration methods. The time step is taken equal to 0.02 sec corresponding to a dt/T ratio of 1/50.



Figure 3: Finite Element Model

Table 1: Model Properties

Model Properties	Excitation Properties
$m = 1 \text{ t}$	$u(0) = 20 \text{ mm}$
$k = 4\pi^2 \text{ kN/m}$	$\dot{u}(0) = 0$
$T = 1 \text{ sec}$	

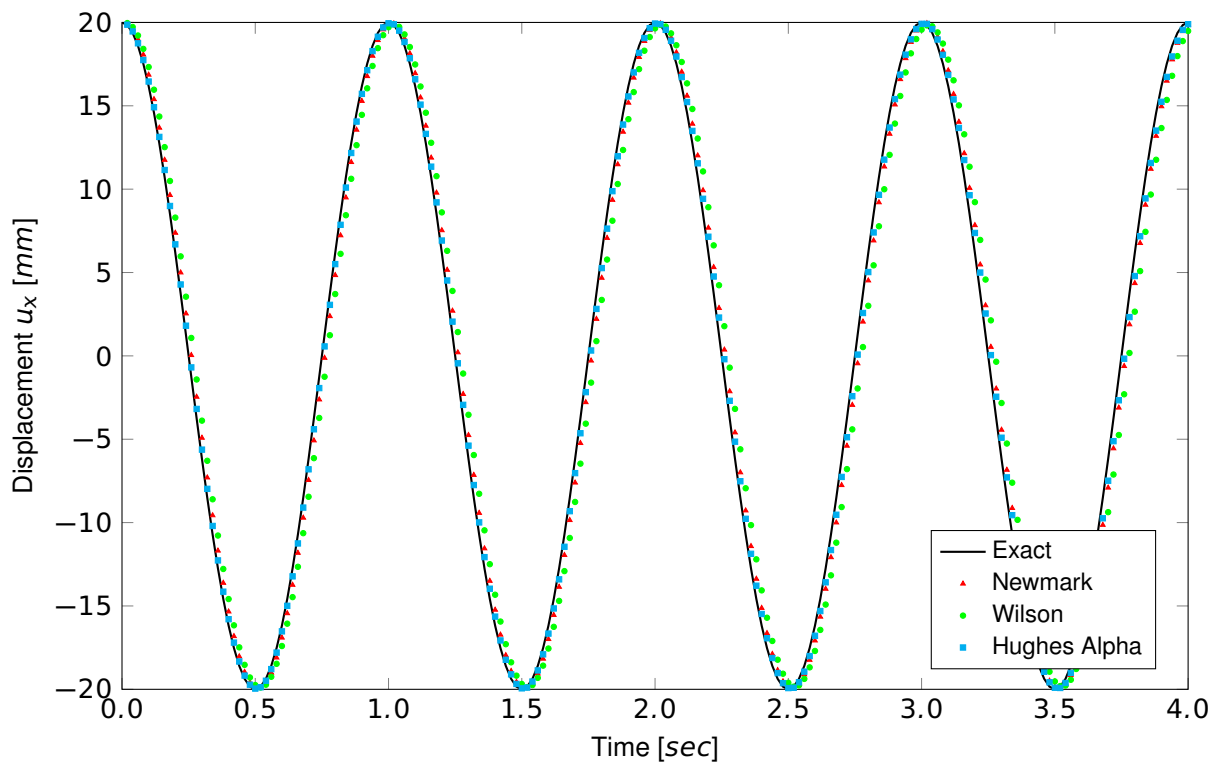


Figure 4: Undamped Free Vibration Response

From the results presented in Table 2, we observe that the response computed by the examined integration schemes is in a good agreement with the exact solution.

Table 2: Results

Integration method	Newmark	Wilson	Hughes Alpha	Ref.
u_{max} [mm]	19.949	19.963	19.956	20.000

4 Conclusion

This example examines the response of a linear elastic undamped SDOF system undergoing free vibration. It has been shown that the behaviour of the system is captured adequately.

5 Literature

- [1] R. W. Clough and J. Penzien. *Dynamics of Structures*. 3rd. Computers & Structures, Inc., 2003.
 - [2] A. K. Chopra. *Dynamics of Structures: Theory and Applications to Earthquake Engineering*. Prentice Hall, 1995.
-